
# Noise-Lock® Doors

Architectural high performance acoustic doors



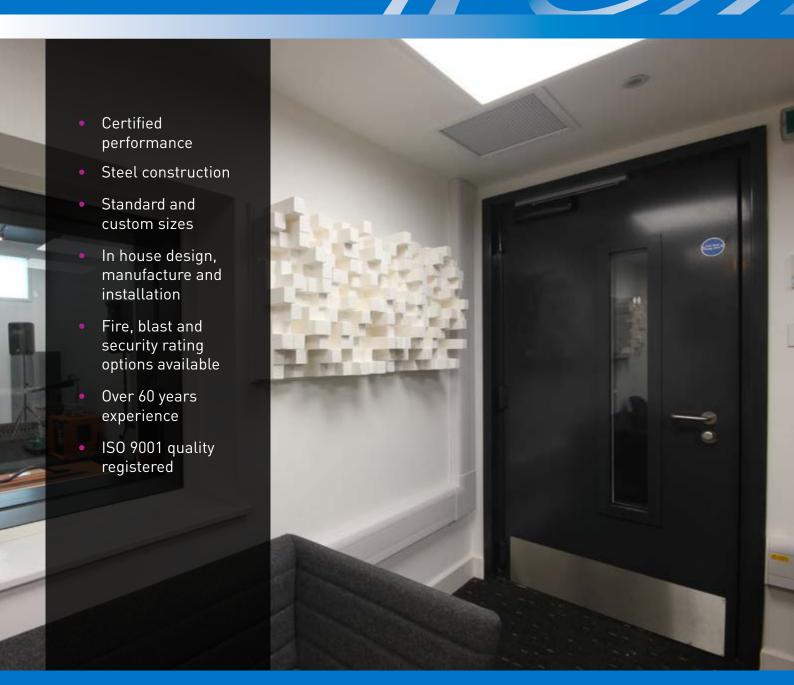

# Noise-Lock®

#### High performance doorsets to suit a wide range of applications

IAC Acoustics is a global supplier of high-performance steel acoustic doors with over sixty years of experience in solving issues relating to noise isolation and containment. IAC offers a wide range of standard models, plus the ability to custom design and manufacture doors to suit specific applications.

Over one million Noise-Lock® acoustic door sets have been installed in industrial and commercial buildings throughout the world. Typical applications include hospitals, hotels, schools, offices, broadcasting studios, nightclubs, museums, test cells, laboratories, plant rooms, and power stations — in fact virtually any situation where sound must be contained within or excluded from a room or building.

#### **Engineered and Factory Assembled Advantages**

IAC Acoustics produces an engineered system — factory assembled complete with a leaf, split-frame, seals, hinges and hardware. All doors are pre-hung for operational alignment, fit and finish before shipping.

Noise-Lock® Doors are laboratory-tested for performance in both IAC R&D facilities and independent laboratories, further supported by installed site testing. IAC Acoustics is renowned for quality, durability and guarantees in-field performance.

BUILDING

## Noise-Lock® Range

- Single leaf
- Double leaf
- Fire rated
- Link
- Glazed
- Hatches

# NOTCH PLUG BUTTON MALE FRAME

FEMALE

FRAME

### **Acoustic Performance**

STC-51/Rw50 to STC-64/Rw63

**Features** 

**Available** 

Blast / ballistic

Radio frequency

Electrical operation


resistance

shielding

## Performance and Flexibility

IAC Acoustics offers a comprehensive range of products designed for architectural, industrial and security applications. IAC Acoustics' Noise-Lock® doors feature:

- Performance ratings from STC-51/Rw50 to more than STC-64/Rw63
- Design flexibility with all doors available in standard and custom sizes or designs
- Multiple sized options of Vision Panels, supported with laboratory test data
- Wood veneer (US) and digital print (Europe) finish options
- High-performance doors for both architectural and industrial applications
- UL, BS and EN fire ratings available
- Blast-resistance ratings up to 3psi
- Radio frequency shielding up to 100dB
- Security rated SCIF that meets ICD 705, JAFAN 6/9 and TEMPEST requirements
- ADA [US] & DDA [UK] compliance
- Industry leading fabrication times and quick-ship programs

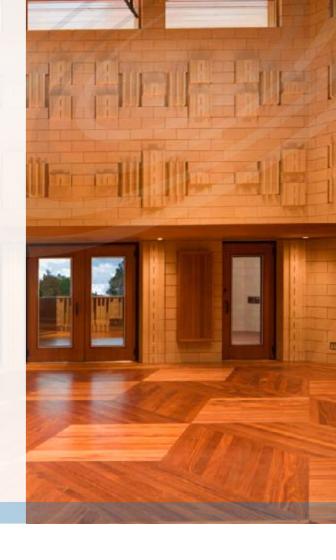

#### **High Performance Features**

IAC Acoustics' features high-performance functionality including:

- Self-aligning magnetic seals assure long life and high field performance, even under constant use
- Cam-lift hinges lower and seal the door to the floor eliminating the high-maintenance of automatic drop seals
- Split frames eliminate in-field grouting to achieve the specified acoustic performance and provide quick and clean installation times

#### **Acoustic Performance**

| Door Model   | Ati- Deti-      |     |     | Leaf<br>Thickness | Octave Band Centre Frequency |                             |     |     |    |    |    |    |        |                  |
|--|-----------------|-----|-----|-------------------|------------------------------|-----------------------------|-----|-----|----|----|----|----|--------|------------------|
|  | Acoustic Rating |     |     |                   | 63                           | 125                         | 250 | 500 | 1k | 2k | 4k | 8k | Weight |                  |
|  | Rw              | R'w | STC | NIC               | THICKITCSS                   | Sound Transmission Loss, dB |     |     |    |    |    |    |        |                  |
| For acoustic performance <50dB, please see IAC Acoustics' range of Noishield Doors |                 |     |     |                   |                              |                             |     |     |    |    |    |    |        |                  |
| Noise-Lock® D-50   | 50              | 45  | 51  | 46                | 64mm / 21/2"                 | 22                          | 26  | 46  | 50 | 52 | 52 | 58 | 51     | 44kg/m² 9lb/ft²  |
| Noise-Lock® D-52   | 52              | 47  | 53  | 48                | 64mm / 21/2"                 | 23                          | 30  | 47  | 52 | 54 | 52 | 57 | 55     | 54kg/m² 11lb/ft² |
| Noise-Lock® D-53   | 53              | 48  | 54  | 49                | 89mm / 3½"                   | 23                          | 32  | 52  | 53 | 53 | 52 | 62 | ≽62    | 78kg/m² 16lb/ft² |
| Noise-Lock® D-59   | 59              | 54  | 61  | 56                | 89mm / 3½"                   | -                           | 33  | 54  | 58 | 60 | 62 | 69 | -      | 80kg/m² 16lb/ft² |
| Noise-Lock® D-63   | 63              | 58  | 64  | 59                | 127mm / 5"                   | -                           | 40  | 56  | 61 | 64 | 66 | 70 | -      | 88kg/m² 18lb/ft² |

#### **Complementary Products**

In addition to doors, IAC Acoustics offers a range of other components that integrate seamlessly to form larger and more complex noise control systems. These products include Moduline<sup>TM</sup>, IAC's modular acoustic construction panel system, Noise-Lock® acoustic windows, TrackWall<sup>TM</sup>, a movable partition system and VisionWall<sup>TM</sup>, a range of large-sized acoustic exterior windows.



#### Head Office - Winchester, UK

**T:** +44 (0) 1962 873 000 **F:** +44 (0) 1962 873 111

E: info@iacl-uk.com



#### **Australia**

**T:** +61 (0) 2 8781 0400 **F:** +61 (0) 2 9725 2939

E: info@iac-australia.com.au



#### Canada

**T:** +1 (905) 612 4000

F: +1 (905) 612 8999

E: toronto@iac-acoustics.com



#### China

**T:** +86 (0) 769 89899966 802

**F:** +86 (0) 769 89899966 810

E: china.sales@iac-china.com



#### Denmark

T: +45 36 77 88 00

F: +45 36 78 12 30

E: nordic@iac-acoustics.com



#### France

T: +33 (0) 3 20 05 88 88

**F:** +33 (0) 3 20 05 88 99

E: france@iac-acoustics.com



#### Germany

**T:** +49 (0) 2163 9991 0

**F:** +49 (0) 2163 9991 23

E: deutschland@iac-acoustics.com



#### Italy

T: +39 0445 575 669

**F:** +39 0445 575 002

E: info@marvinacustica.it



#### Spain

T: +34 93 321 6684

F: +34 93 321 6249

E: espana@iac-acoustics.com



#### **UAE - Dubai**

T: +971 42 517 456

F: +971 42 517 457

E: dubai@iac-acoustics.com



#### **USA** - Houston

T: +1 (832) 554 0980

F: +1 (832) 554 0990

E: houston@iac-acoustics.com



#### **USA - Lincoln**

T: +1 (402) 323 7272

F: +1 (402) 323 7271

E: lincoln@iac-acoustics.com



#### USA - New York

T: +1 (718) 931 8000

F: +1 (718) 863 1138

E: newyork@iac-acoustics.com